


H SERIES AGITATOR

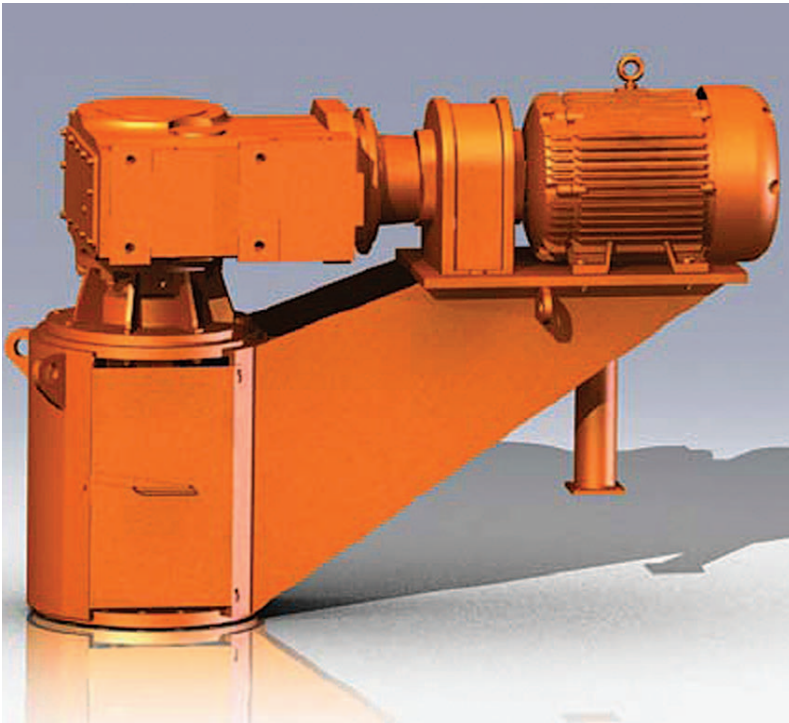

- Rugged cast iron housing resists shock loads and maintains accurate gear alignment.
- High efficiency helical/spiral bevel gearing per AGMA/ASME standards. Gearing is hobbed, case hardened, and profile ground.
- Oversized high capacity alloy steel output shaft which provides stiffness to accommodate high bending loads.
- Heavy-duty output shaft bearings designed to carry radial and axial loads generated by mixing impellers.
- Output shaft bearing lives in excess of 100,000 hours.
- Dry-Sump on output shaft which provides safety against oil leakage.
- Designed to allow use of NEMA or IEC motors.
- Double and Triple reduction available.

GUARANTEE

ProQuip, Inc. accepts full responsibility for furnishing suitable equipment which shall be fit for the purpose which it is required, and for its successful operation under the conditions for which it was specified

Sizes: 1 to 100 HP
Speeds: 1 to 350 RPM
Shaft Diameter: Up to 5 inches

ProQuip, Inc.
**Designers and Manufacturers of
Agitation Equipment**
850 East Highland Road
Macedonia, Ohio 44056-2190 USA
330-468-1850 • (fax) 330-467-3724
www.proquipinc.com
sales@proquipinc.com