


J SERIES TANK AGITATOR

Sizes: ½ to 5 HP
Speeds: 30 to 350 RPM
Torques: up to 3,000 in-lbs
Shaft Size: 1½ inches standard

- **Rugged cast iron housing** resists shock loads, maintains accurate gear alignment
- **Quiet gearing** runs at less than 85 dba

- **Hollow quill design** for easy installation of shaft and precise alignment
- **Heavy-duty output shaft bearings** with L-10 lives in excess of 70,000 hours
- **Dry-well dam around output shaft** provides a positive barrier against oil leakage

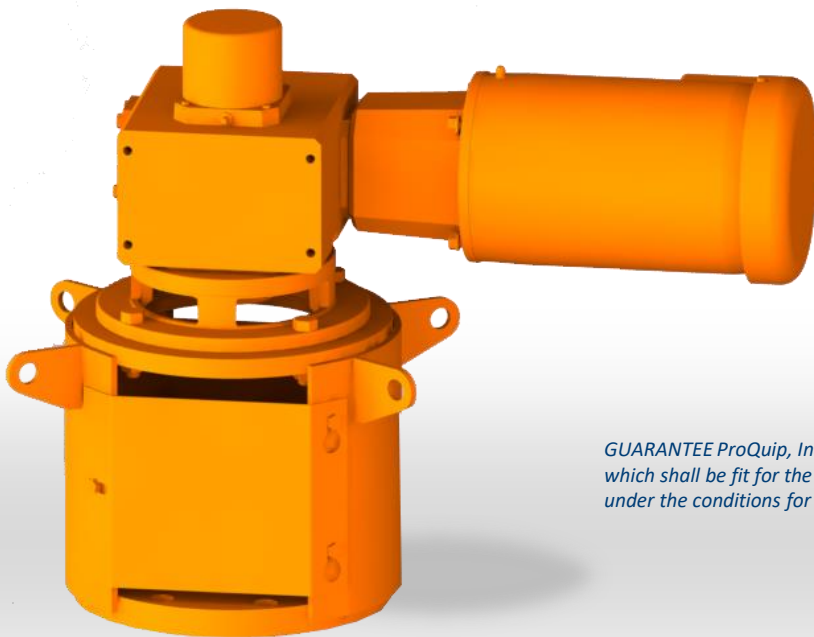

NEMA C-face
Motors Flexibly
Coupled to Gearbox

GUARANTEE ProQuip, Inc. accepts full responsibility for furnishing suitable equipment which shall be fit for the purpose which it is required, and for its successful operation under the conditions for which it was specified.