


# K SERIES TANK AGITATOR

Sizes: ½ to 7½ HP  
Speeds: 30 to 350 RPM  
Torques: up to 5,000 in-lbs  
Shaft Size: 2 inches standard

- **Rugged cast iron housing** resists shock loads, maintains accurate gear alignment
- **Hollow quill design** for easy installation of shaft and precise alignment
  - **Single reduction involute helicoid thread form worm gearing**
  - **Heavy-duty output shaft bearings** with L-10 lives in excess of 70,000 hours
  - **Dry-well dam around output shaft** provides a positive barrier against oil leakage

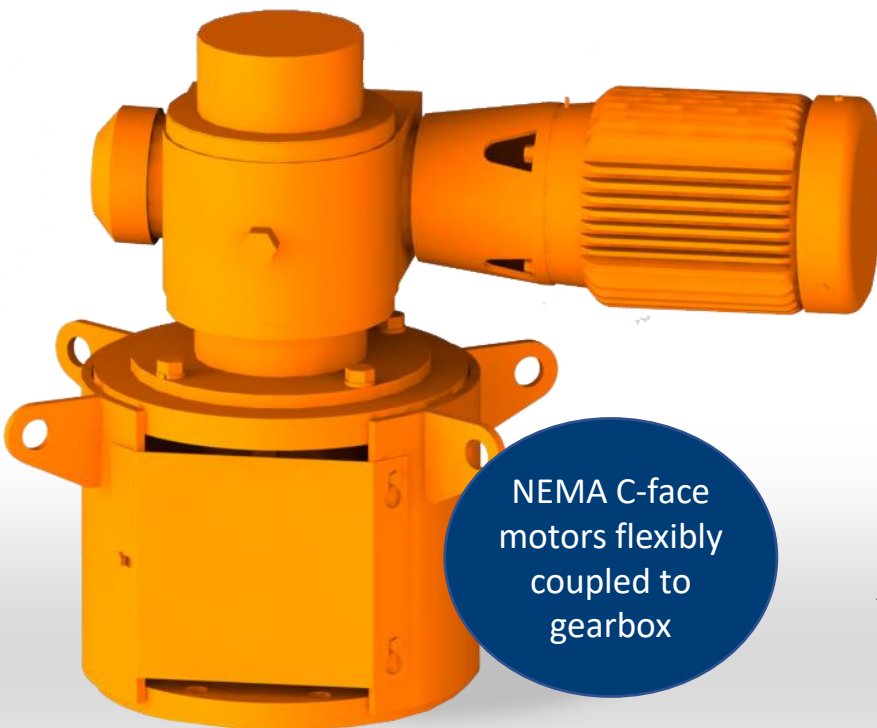

NEMA C-face  
motors flexibly  
coupled to  
gearbox

*GUARANTEE ProQuip, Inc. accepts full responsibility for furnishing suitable equipment which shall be fit for the purpose which it is required, and for its successful operation under the conditions for which it was specified.*