


VR SERIES TANK AGITATOR

Sizes: 5 to 400 HP
Speeds: 10 to 250 RPM
Torques: up to 1,000,000 in-lbs
Shaft Sizes: up to 8.5 inches

NEMA or IEC
Motor Flexibly
Coupled to
Gearbox

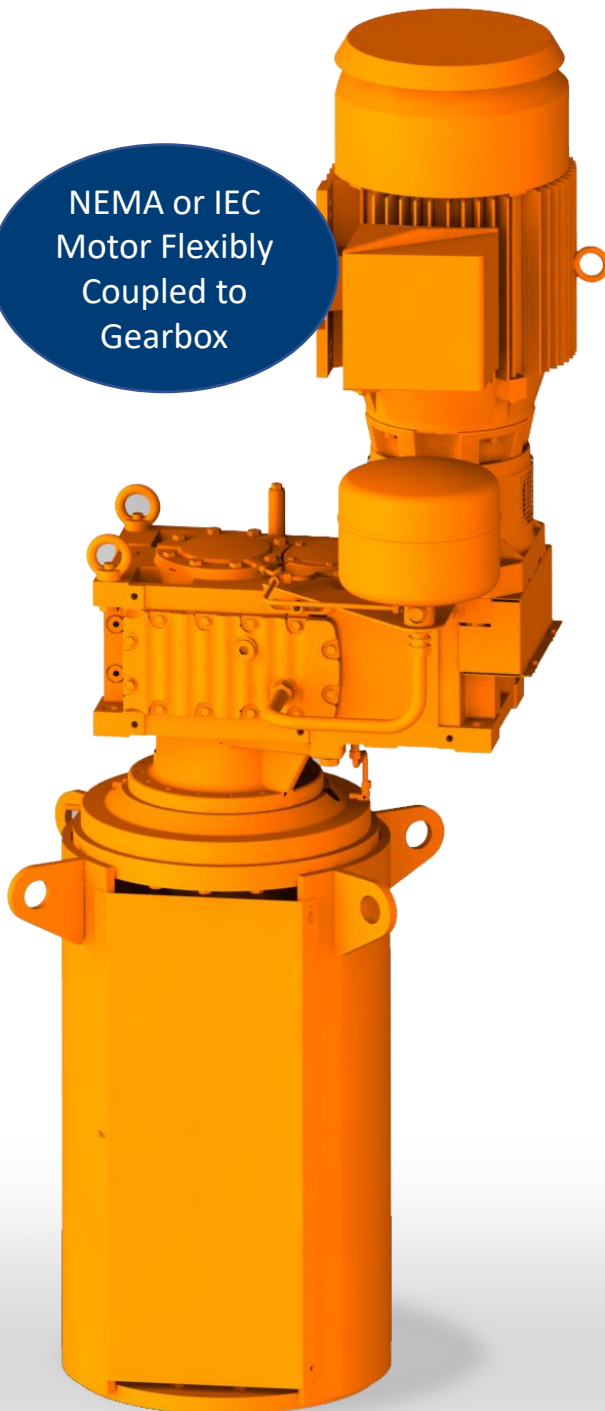

- **Rugged cast iron housing** resists shock loads, maintains accurate gear alignment
- **High efficiency multi-stage helical gearing** per AGMA/ASME standards.
- **Extended bearing distance design** provides added stiffness for high bending loads
- **Heavy-duty output shaft bearings** carry radial and axial loads generated by mixing impeller. L-10 bearing lives in excess of 100,000 hours.
- **Radial labyrinth sealing system** provides safety against oil leakage

GUARANTEE ProQuip, Inc. accepts full responsibility for furnishing suitable equipment which shall be fit for the purpose which it is required, and for its successful operation under the conditions for which it was specified.